



Genuine Parts

IMPREZA

SIDE VISOR

OPERATION MANUAL
INSTALLATION INSTRUCTION

For customers

Thank you very much for purchasing Subaru genuine side visor.

Please read this manual before using the product and keep this manual close at hand at all times so that you can use the product correctly for a long time of period.

To avoid installation error, always have the installation work conducted by a Subaru-specified agent or a dealer specified by a Subaru-specified agent.

Notice

Read this manual before using the product. Make sure that you always handle the product correctly.

Keep this manual close at hand at all times for easy access.

⚠ Handling instructions

1. To clean the side visor, impregnate a soft waste with a diluted neutral detergent, wipe the surface gently with it, then wipe it with water to remove all the detergent.
2. Never use gasoline, thinner, acid, alkali, or other organic solvent.
3. In order to adhere the double-side tape firmly, do not wash your car for at least 24 hours after you install the product.
4. Never use wax for this product.

For installation agents

This manual describes how to install and handle the side visor.

Be sure to read this manual before installing the product for correct installation.

After installation, be sure to handle this manual to the customer.

⚠ Caution

- The CAUTION mark indicated in this operation/installation manual is for your safety on handling and installing this product. Therefore, be sure to observe the mark.
- Never remodel this product.
- Never apply any installation and use methods not indicated in this operation /installation manual.
- If you have any question about this product itself or product handling or installation, please ask the dealer of this produce and understand it before its use.
- We may not take responsibility for any defects occurred by the disobedience to the items described in this manual.

Supplier  Fuji Heavy Industries Ltd.

IMPREZA!CO

SIDE VISOR

Genuine parts No. E 3 6 1 0 F E 0 0 0

Applicable model : SEDAN (2001 MY ~)


1 Component Parts



Caution

- Be sure to confirm the component parts as below before you start the installation.

No.	Part name	Qty	No.	Part name	Qty
①	Side Visor L H	1	⑤	BRKT. C	2
②	Side Visor R H	1	⑥	Installation Instructions	1
③	BRKT. A	1 0			
④	BRKT. B	2			

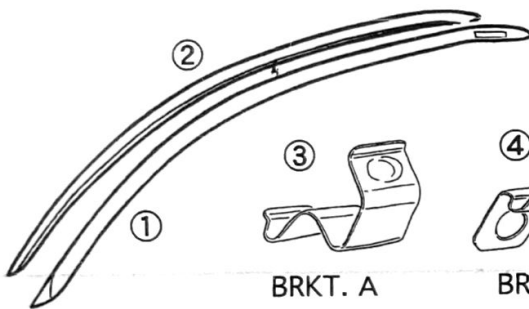

BRKT. A

BRKT. B



BRKT. C



⑥



Installation
Instraciton


2 Required tools

White gasoline Soft cloth Hair dryer Scale Primer K500 Masking tape Phillips screw driver



3 Drawing of the product installed.



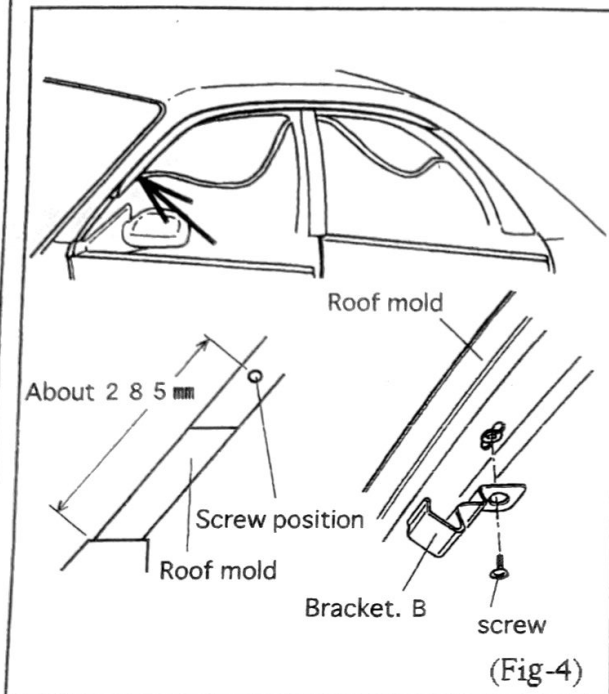


2 .Positioning of side visor

- ① Remove the car screw at the inside of the roof mold attached about 285mm from the top of the roof mold. (The 2nd screw from the front end of the roof mold.)

⚠ Caution

- (1) The car screw is used again ; therefore, do not lose it .



- ② Hook the bracket B inside the roof mold and fix it with the car screw which is removed previously. (Fig-4)

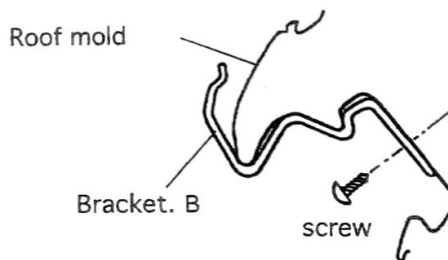

- ③ Install the bracket B which is installed ②. (as shows Fig-5) Position the height of the side visor so that it matches the upper end line of the roof mold , and fix the front and rear sides of the side visor temporarily. (Fig-6 and Fig-7)


⚠ Caution

- (1) When the ambient temperature is 15 °C or less, warm both the whole part of the double-sided adhesive tape of the side visor and the roof mold of the car with a dryer or the like so that they become about 30 to 50 °C. Do not warm them partially ; otherwise , they may be transformed. Do not use an industrial dryer.
- (2) Do not install the side visor at a lower position ; otherwise , the side visor may touch the door window when the door is opened/closed and the side visor and door window may be damaged.

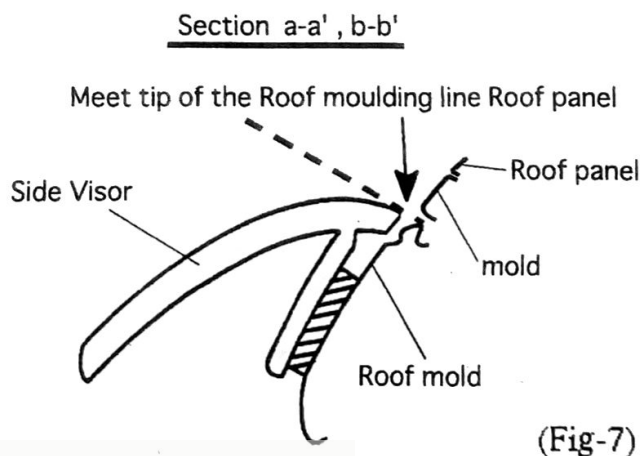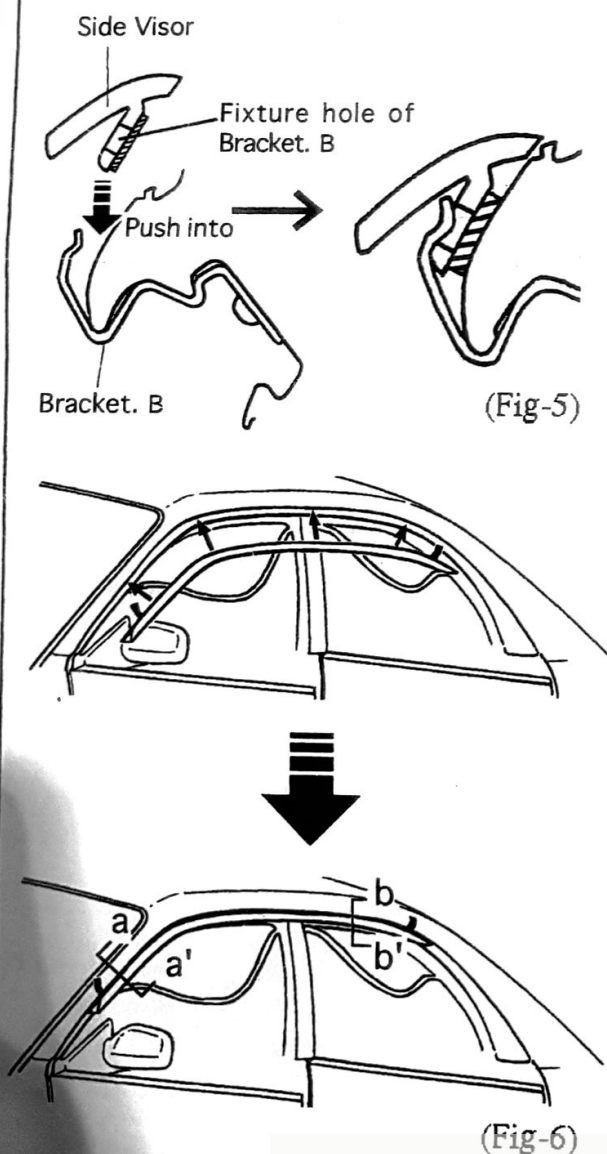


4. Installation procedure

The procedure described below shows for the LH side. Install the side visor at the RH side as well.

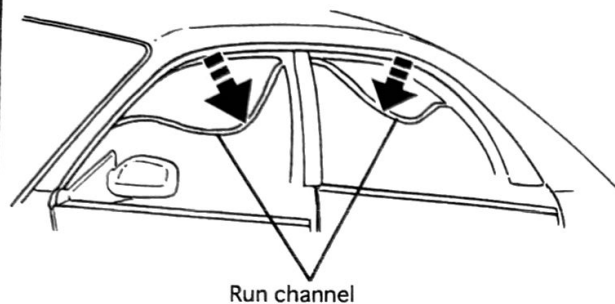


Run channel

(Fig-1)

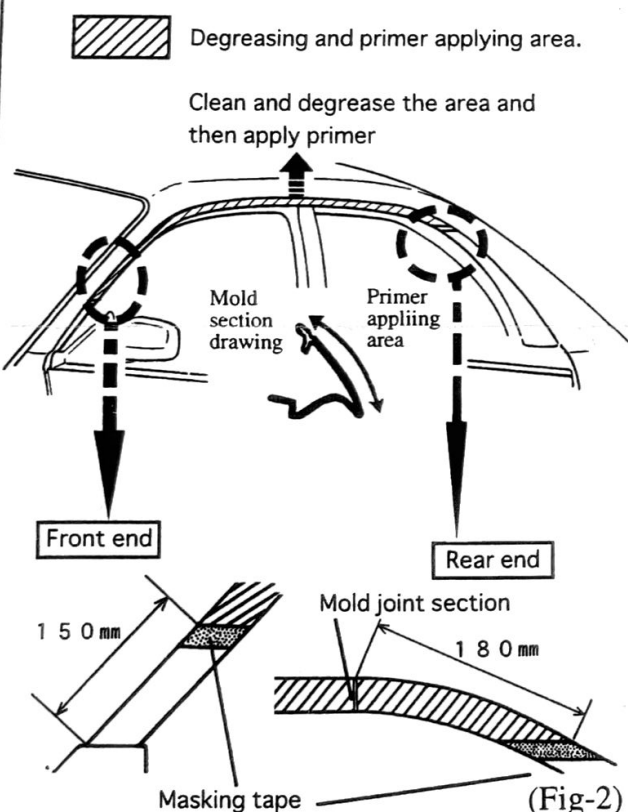

(Fig-2)

Peel off both ends of the peel-off paper by about 5 cm and bend them upward.

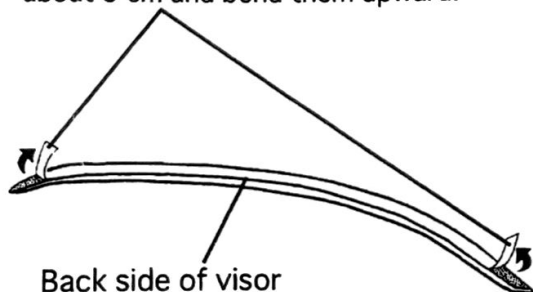

Back side of visor

(Fig-3)

⚠ Caution

- (1) Stop a car in a flat place so that the installation can be conducted safely, turn off the engine, and apply the hand brake so that the car cannot be moved.

1. Preparation of side visor installation

- ① Open the front and rear doors, and pull out the run channel from Roof mold. (Fig-1)

⚠ Caution

- When the room lamp lights, turn off the switch.
- (2) Pull out the run channel evenly. If you pull it out partially, it may be severed.

- ② Mask the front end and rear end of the roof mold with a masking tape (see the left-side drawing) (Fig-2)
- ③ Wipe off dirt or wax on the side visor installation area (the shaded area in the left-sided drawing) with white gasoline or the like and dry the area completely.
- ④ Apply primer (K500 or equivalent) on the side visor installation area. (Be sure to apply primer twice.)
- ⑤ Peel off the masking tape.

⚠ Caution


- (1) Measure the masking position on the basis of the upper side of the mold and stick the masking tape horizontally.
- (2) Do not apply primer on the surface other than the side visor installation area at the roof mold. When primer is overflowed from the masking tape area, wipe it off with white gasoline or the like.
- (3) Before applying primer, read the instruction manual and caution of the primer well.
- (4) After applying primer once, dry it for about 3 minutes and then apply primer again.

- ⑥ Peel off both ends of the peel-off paper of the double-side adhesive tape attached on the side visor by about 5 cm and bend them upward so that they can be peeled off later from the outside. (Fig-3)

⚠ Caution

- (1) Do not touch the adhesive side of the double-side adhesive tape after peeling off the peel-off paper. Otherwise, adhesive strength may be decreased.

Peel off the peel-off paper.

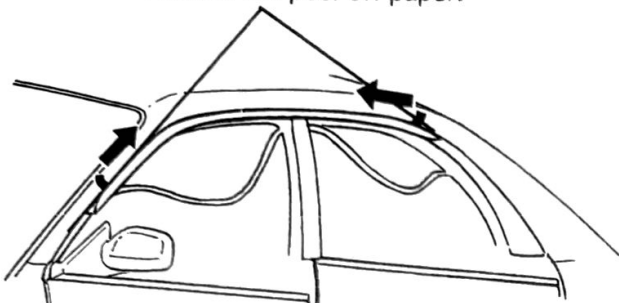


3 .Installation of side visor


- ① Align the side visor to the top end roof mold and peel off the peel-off paper of the double-side adhesive tape to install the side visor.

⚠ Caution

- (1) Peel off the peel-off paper so that the side visor does not get out of the position. Also note that the peel-off paper is not severed halfway.

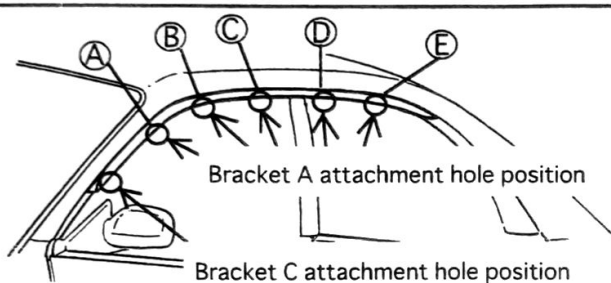


Bracket A attachment holes (A) to (E)

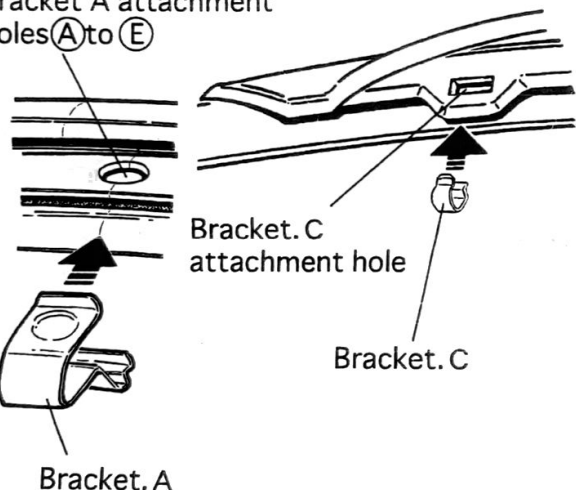


- ② Push the bracket A into the bracket A attachment hole position [(A) to (E)] of the side visor until a snap sound is heard.
- ③ Push the bracket C into the bracket C attachment hole position of the side visor until a snap sound is heard.

How to attached bracket A

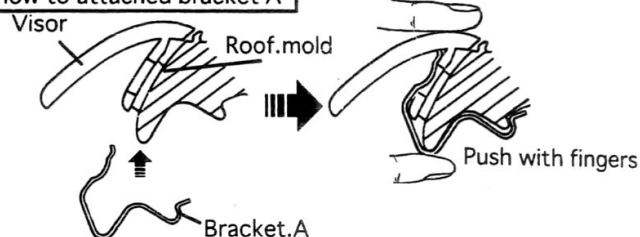

How to attached bracket C

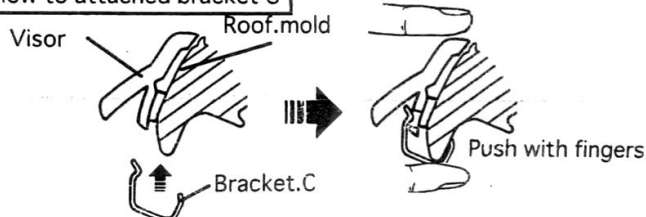


⚠ Caution

- (1) Before attaching the brackets, check the bracket attachment holes indicated in the left-side drawing.


- ④ Press-fit the side visor on to the roof mold.

⚠ Caution


- (1) Press the whole of the attachment surface with fingers to attach the side visor firmly.
- (2) Check that the side visor is firmly attached.

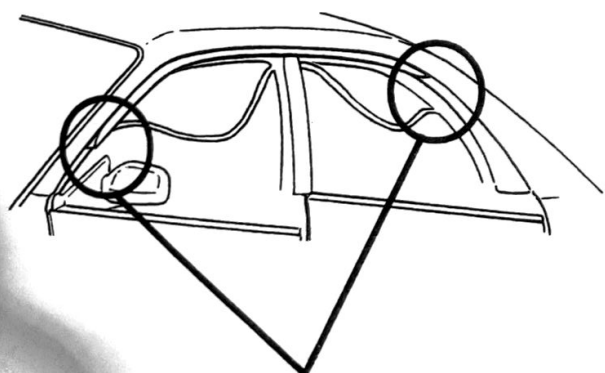

Press-fit the top end and rear end firmly.

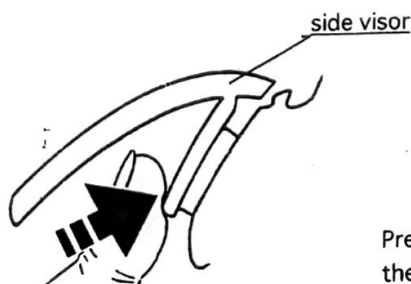

Press-fit the whole of the attachment surface with fingers.

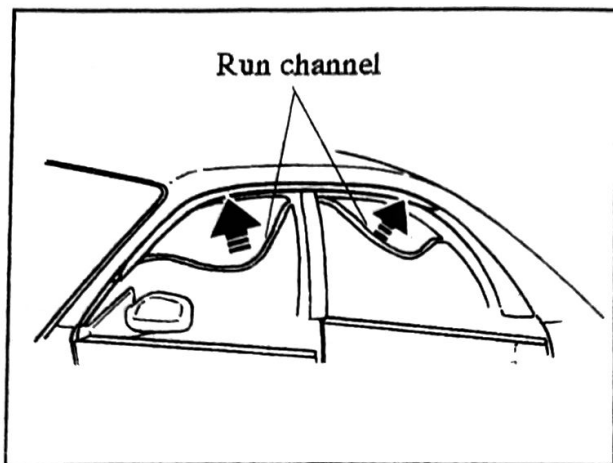

- ⑤ Return the channel to the roof mold. This is end of the installation.

⚠ Caution

- (1) Install the run channel firmly so that no floating or slack is found.

* Install the side visor at the right side with the same procedure.